ARC

Aesthetic Residential Commercial

# Every Home, a Signature ARC Creation

QBCC License 15090326

Client Details

Bishamber Singh
Ramandeep Kaur

# Inclusions Overview

At ARC Builders, quality is never an option—it's our standard. Every element included in your build reflects our commitment to luxury, precision, and enduring craftsmanship.

# Plans, Compliance & Warranty

- Engineer certified frame and trusses
- Customized design
- Elevations/cross sections detail
- Slab details
- Bracing details
- Electrical layout
- All construction and liability insurance
- Soil allowance M class
- No allowance made for piers
- Wind category N2
- Facade to meet minimum covenant requirements
- Full slab parameter termite barrier
- QBCC Insurance
- Q Leave
- Energy efficiency assessment
- Twelve (12) months maintenance warranty
- Six (6) year structural guarantee

# Included Fees & Services

- Building Application Fees
- Plumbing Compliance Assessment Fees
- Energy Rating Assessment Fees
- Soil Report Fees
- Slab Design Fees
- Structure Design

# Site Works & Preparation

- Site works - Builder has allowed for an equal cut and fill to a maximum 500 mm fall for building pad
- Earthworks to enable level building platform

# Concreting Excellence

- Slab design by engineer
- Concrete pumps are included for slab only.
- 36 sqm exposed aggregate driveway allowance

# DRAINAGE AND COMPLIANCE

- Sewer installation to be in accordance with Plumbing and Drainage Act 2018 and Local Authority Approved Plan

This Photo CC

# FRAMING

- Steel frame and trusses
- Ceiling internal height to be 2550mm
- Provide niches, bulkheads and cut outs as per plan in shower area.

This Photo by Unknown Author is licensed under CC

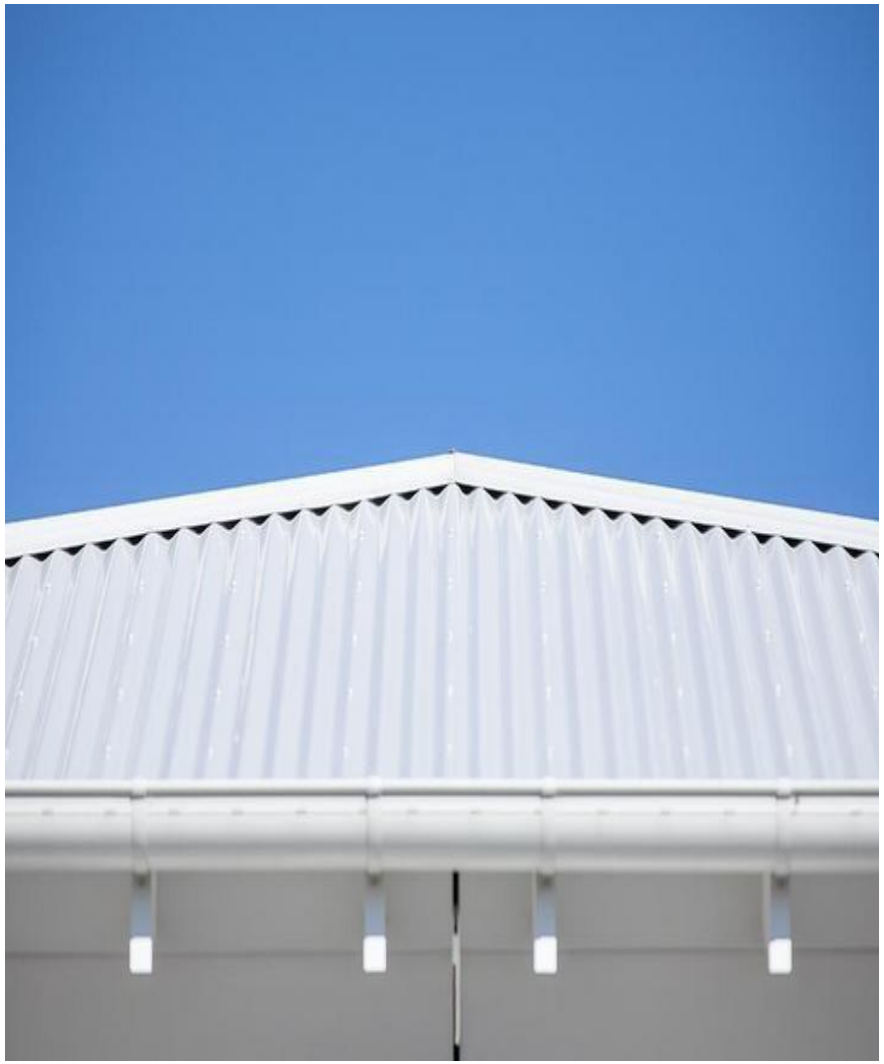

# ROOFING

- Colorbond roof
- Roof insulation as per energy efficiency
- Gutters and fascia from the standard Colorbond range

# ALUMINIUM WINDOWS & DOORS

- All aluminium sliding windows and doors have key locks
- All colours are from the standard builder’s colour range
- Aluminium window and door frames to be powder coated aluminium from the selected Builders range
- Window and external sliding door glass to be clear single glazed
- Obscure glass to bathroom, toilet and ensuite windows

# EXTERNAL FINISHES

- External walls to be face bricks on front and cladding on sides and back
- Alfresco floor to be tile finish from builders’ range

# DOORS EXTERNAL

- Door height to be 2340 mm
- Entry door to be 1200 mm from builders’ range
- Front entry door, painted in the client's selected colour from the Hume Builders’ Range
- Garage door to be 4800mm X 2100mm

# INTERIOR TRIM

- Skirtings to be 66 mm x 11 mm pine or MDF
- Architraves to be 42 mmx 12mm pine or MDF

# Interior Linings

- Internal walls to be sheeted with 10mm plasterboard
- Wet area walls to be sheeted with 6mm villa board.
- All internal areas to be 90mm coved cornice.
- Laundry and wet area include water resistant plaster board

# Internal doors

- All internal doors Hume flush panel.
- Internal door height to be 2340mm.
- All internal door lever handles from builders range
- Front door handle from builders range
- Privacy door handles for toilets, bathrooms, and master bedroom and entrance to garage from house only
- Door stops to be PVC from builders’ range

# CUPBOARDS & ROBES

- Linen cupboards- 4 shelves included
- Bedroom cupboards with vinyl face sliders
- Robes- Full length melamine shelf and chrome hanging rail throughout

# TILES AND TILING

- Main floor to be ceramic tiles from builders' range.
- Carpet in rooms allowance $35 per SQM

# Kitchen Essentials- From Omega

- Electric Cook top-900mm Free standing
- Range hood
- Dishwasher with 12 place settings

# Bespoke Kitchen Joinery

- Kitchen cabinetry as shown in kitchen plan drawing
- Soft closing drawers and doors with handles
- Kitchen overheads cupboards per plan
- Overhead cabinets height 2100mm from the floor
- Kitchen island bench width 900mm with 20mm stone from builders’ range
- Kitchen stone 20mm

# Bespoke Kitchen Joinery

One set of 4 drawers in the kitchen including cutlery tray

Bulkhead over the over-head cupboards

Polytec melamine kitchen doors in builder range Provision for dishwasher -includes power point

-includes cold-water tap located under kitchen sink Kitchen splash to be tiled

# BATHROOM AND ENSUITE

- Bathroom-frameless mirrors same width as vanity
- Dual flush toilets–“Watermark“ with soft closing toilet seat
- Ceramic vanity with top mount basin
- W.C. floor and skirting tiles only
- Laundry splashback and skirting tiles
- Semi-frameless shower screens.
- Niches to shower areas.
- All taps from Trade link Surrey range.
- Flooring with ceramic tiles from builders’ range
- Standard height bathroom tiles .
- 2  bathrooms  included

# Laundry Fixtures

- Laundry mixer tap and trough
- Washing machine taps
- Laundry floor to be tiled.
- Skirting tile to be no more than 200mm high
- Splashback tile included
- Tiles from builder range
- All taps to be from Tradelink Surrey range

# Ambient Lighting Systems

- Clipsal Iconic Range
- One back sensor lights from builders’ standard range
- Power connection included single phase.
- 7 Double power points to all of house per electrical plan
- TV point
- Provisioning for NBN Connection
- Smoke detectors hardwired as per Australian standards
- Safety switches installation
- Underground power upto 6 metres set back or overhead power to a riser bracket
- Main switchboard meter box enclosure for single phase supply and circuit breakers
- 15 downlights per plan.

# PLUMBING

- Exterior taps included one hose tap at the side of the house
- Thermann or similar brand 250 Ltr electric hot water system

# INSULATION

- Sarking and insulation bats as per Energy Efficiency requirements
- 14 KW Panasonic ducted aircon included with 4 zones

# PAINTING

- All painting as per installation specification
- Paint colours builder range. Colours to be confirmed by client.
- Interior walls to have three coats paint to manufacturer's specifications (sprayed and backrolled)
- Ceilings to have two coats of paint to manufacturer's specifications (sprayed and back rolled)
- Interior architrave, skirting, jambs and reveals to be finished with gloss paint
- Front door to be paint finish
- External timber doors to have enamel gloss paint to manufacturer's specifications

# MISCELLANEOUS ITEMS

Builders house clean is to be completed prior to handover

Site clean-up and removal of all construction debris

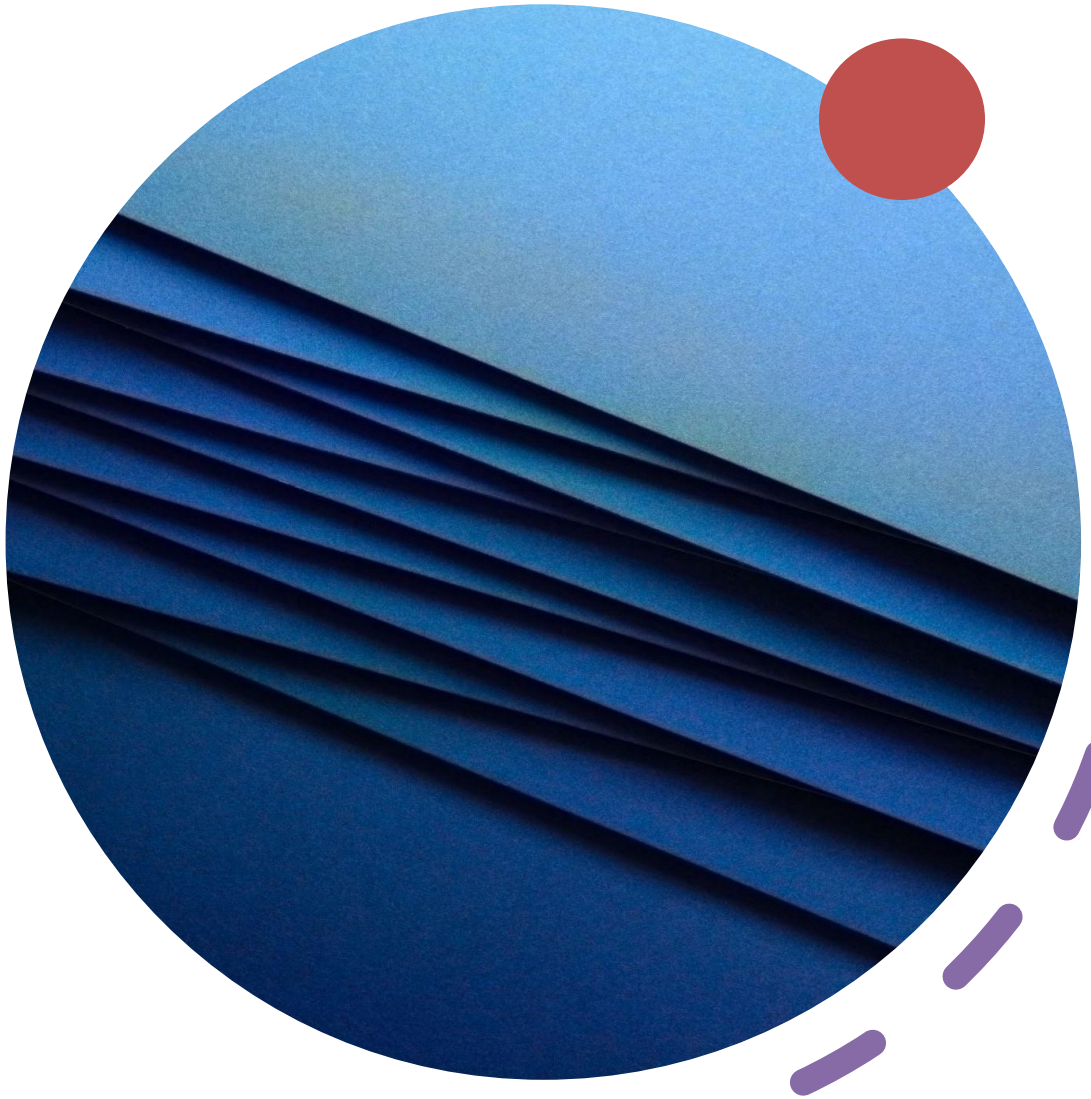

# Price for 210 sqm

# $ 340000

Disclaimer This inclusion sheet is for reference only and may be subject to change.
Product selections, brands, and specifications are indicative and may vary due to availability. Variations or upgrades may incur additional costs. Final selections must be confirmed in writing.